
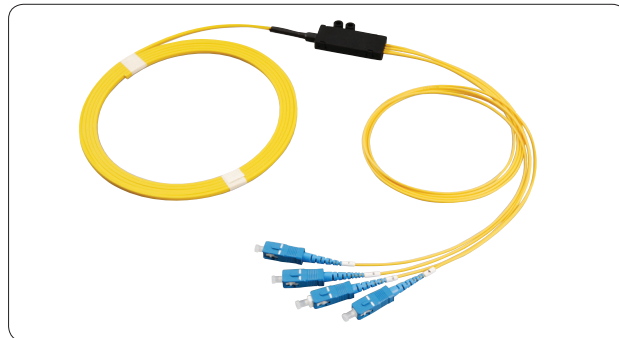



○ Fan-Out Patch Cord

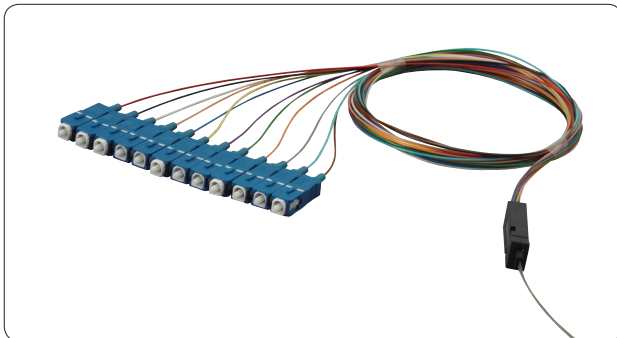

Specification

Parameter	Condition	Value [dB]		
		Min	Typical	Max
Insertion Loss			< 0.15	< 0.30
Return Loss	SPC	> 40	> 45	
	UPC	> 50	> 55	
	APC	> 60	> 65	
Mating Durability	500 times			< 0.20
Temperature Cycling	-40°C ~ +85°C			< 0.20
Humidity Cycling	75°C, RH 95%			< 0.20
Vibration	10~55Hz [3 Axis]			< 0.20
Impact	1.5m drop, 8 times			< 0.20

○ MTP / MPO Patch Cord

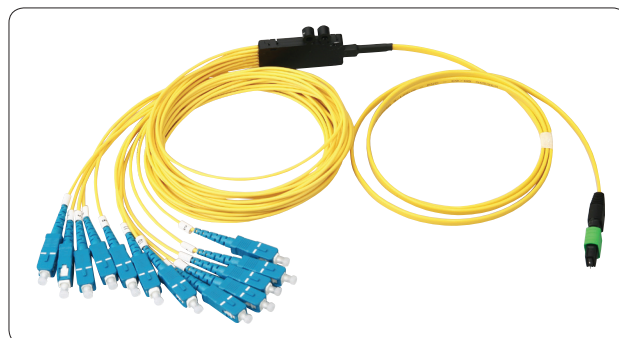

Specification

Parameter	Single - Mode	Multi - Mode
Insertion Loss [dB]	< 0.75	< 1.0
Return Loss [dB]	> 40	
Durability	< 0.3dB Typical change, 200 Matings	
Operating Temperature	-40°C ~ +85°C	
Ferrule Hole Sizes	125.0+1 / -0μm, Concentricity : ≤0.1μm	127μm, Concentricity : ≤3μm